


MARKA**ROOF****MODEL****R- D 190****ÖZELLİK****KONFERANS DELEGE MİKROFON ÜNİTESİ****DELEGE MİKROFON ÜNİTESİ****KONDERSER MİKROFON****KUTUP DESENİ: TEK YÖNLÜ,****BİRLEŞİK KABLO UZUNLUĞU 2 METRE,****FREKANS TEPKİSİ:60Hz-16Khz****HASSASLIK:-47dB****SNR:60dB,8P****JAK,2.1mm 8p****KORUYUCU TEL GİRİŞ GERİLİMİ:18V**

MARKA
ROOF
MODEL
R- D 190
ÖZELLİK
KONFERANS DELEGE MİKROFON ÜNİTESİ

Professional Conference System

Delegate Unit

Each delegate unit (or more) you need to configure a host, such representative Unit built a super point back-electret microphone, while the microphone to work, gooseneck lamp with a red circle lights (other delegates at a glance the microphone opening) and the base plate also has a similar function front small lamp. Each system can be connected to 60 delegate units, divided into three-way tandem, each 20 units, plus expansion unit can be connected to up to 180 delegates.

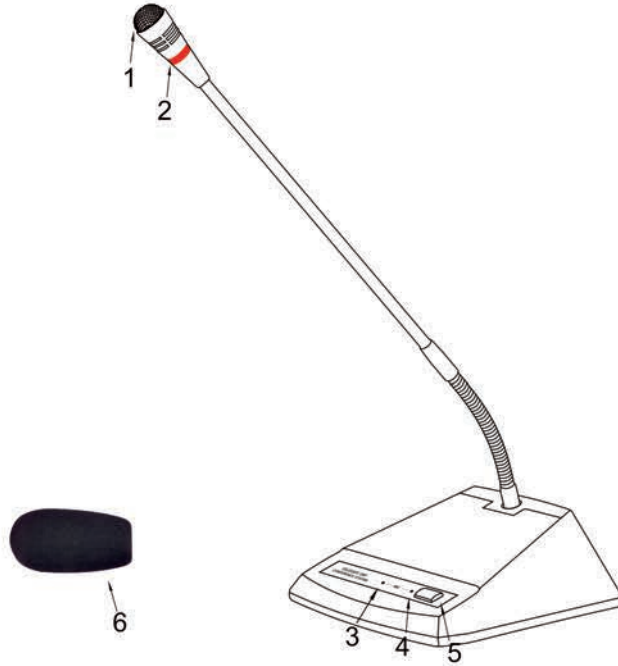

- 1 The microphone sound head.
- 2 Super bright LED lights ring; when open microphone unit, light ring illuminates.
- 3 The number of microphones limit indicator; when the unit reaches the open mic venue set amount, is not open when you press the microphone unit, the light flashes.
- 4 Work lights; when the microphone to work in this light shine.
- 5 The microphone switch.
- 6 Wind sponges; put the sponge is more effective in preventing noise and whistle.

MARKA**ROOF****MODEL****R- D 190****ÖZELLİK****KONFERANS DELEGE MİKROFON ÜNİTESİ**

Professional Conference System

